



1202217 Pump and Handle Assembly

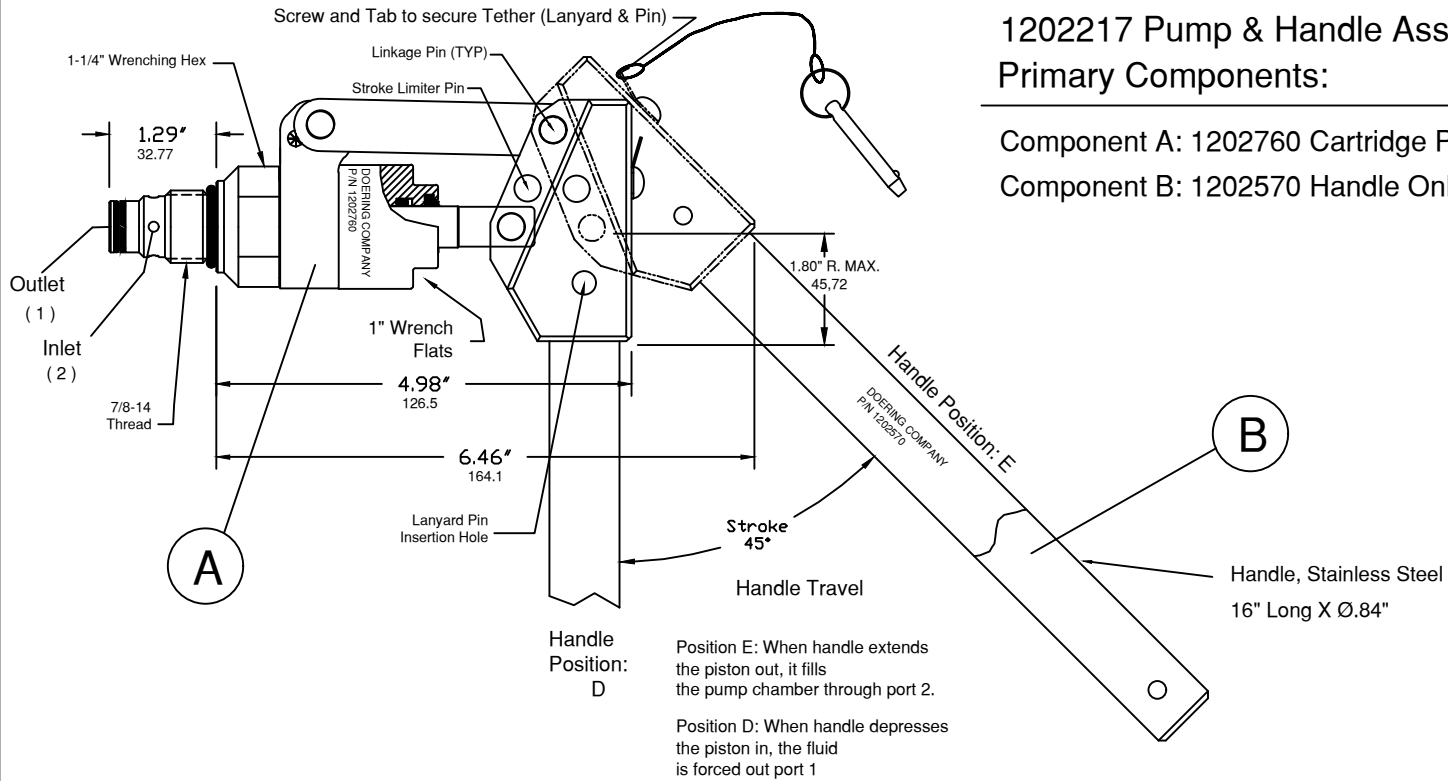

PUMP SELECTION GRAPH

Maximum Safe Operating Pressure 5000 PSI
 Maximum Safe Handle Force 150 Foot Pounds

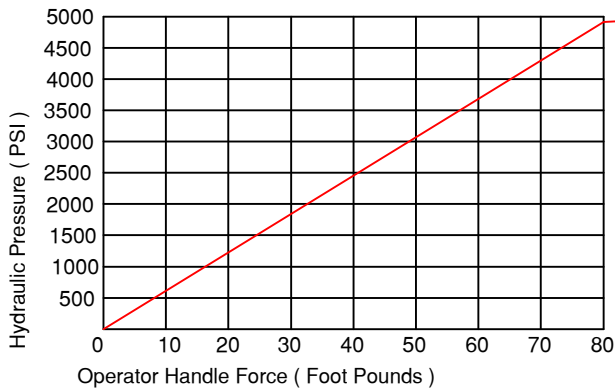


DISPLACEMENT, FULL STROKE,

Cubic Inches	Cubic Centimeters
.196	3,2cc

INSTALLATION:


Lubricate seals.
 Use 1-1/4" Wrench.
 Torque to approximately 50 Foot Pounds.

CAVITY



REQUEST CAVITY DRAWING: C-8542
 REFERENCE FORM TOOL: FT-8542

Functional Symbol



6343 RIVER ROAD SE ■ CLEAR LAKE, MN 55319 USA
 Telephone: 320-743-2276 ■ Fax: 320-743-3723
 mailbox@doering.com ■ www.doering.com



DOERING