

D2- Monoblock Directional Hydraulic Control Valve

Functional Symbol:

[Click here for spool options](#)

Description:

The Doering Monoblock Hydraulic directional control valve is available in one (D1), two (D2) and three (D3) spool configurations. This hydraulics valve was designed for applications in which one valve is required to operate separate Hydraulic circuits independently.



Features:

- One piece mono-block body construction using high tensile cast iron.
- Hard chrome plated and precision fitted spools.
- Easy installation with inlet and outlet ports on same end.
- Load check for each spool prevents accidental load drop (omitted with motor spool).

Installation Examples:


[Hydraulic Circuit- Selector Valve w Optional Float Spool](#)

[Hydraulic Circuit- Double Selector w Power Beyond Directional](#)

SPECIFICATIONS


Flow Capacity	Pressure Rating	Temperature Range	Weight
8 GPM 75 (L/MIN)	3000 PSI (207 Bar)	-22° to + 194° F -30° to + 90° C	4 LBS. 6 OZ (1.98 KG.)

Pressure Drop Characteristics:

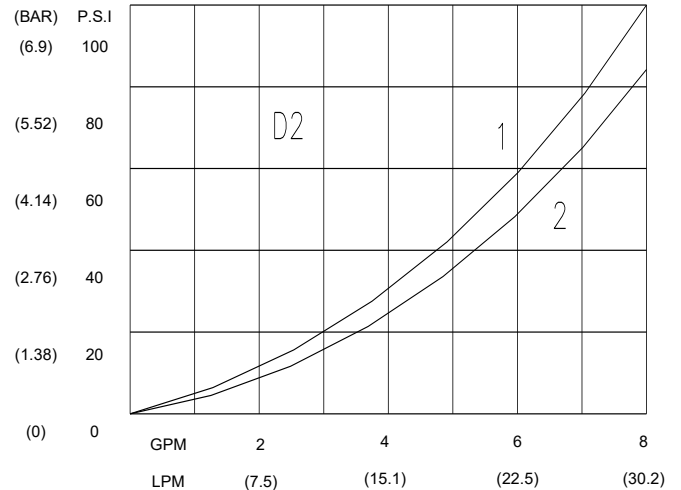

D2- Monoblock Directional Hydraulic Control Valve

Technical:

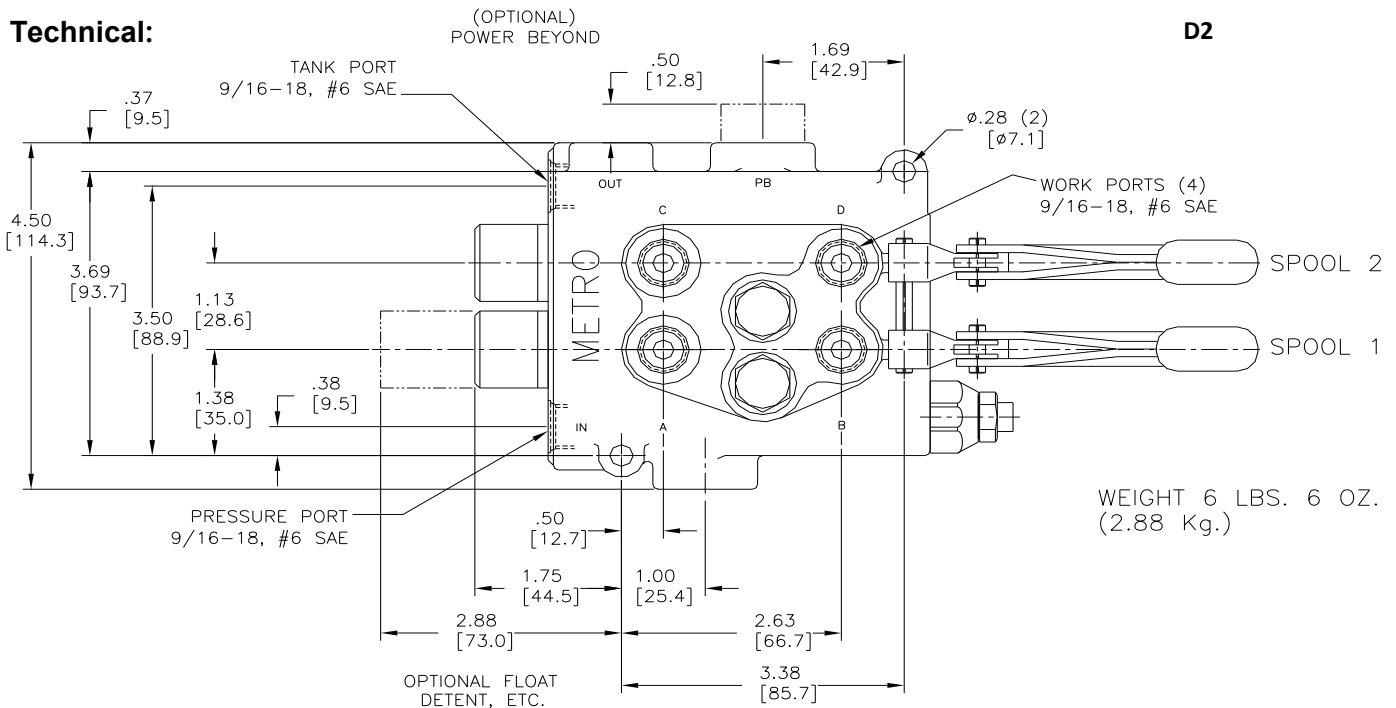


Ordering Instructions:

Model	Relief Pressure	Spool Type Options	Power Beyond	Handle Options	Finish Options
D2	O No Relief	T1 Float Spool (Spool 1 only)	Q PB not included-plugged	Blank No Handles	Blank Plain Casting
	G 900 PSI	T2 Tandem Spool-Spring Center	P Power Beyond	J Stamped handle with grip (2)	ZP Zinc Plated
	A 1000 PSI	T2FL Tandem Spool-Heavy Duty Spring Center	S Closed Center Plug	JU Stamped handle with grip. Configured to install handle 180°. (2)	N Micro switch shroud and wires.
	B 1500 PSI	TE2 Tandem Spool-Spring Center w/ .250 hole in tang.		NL 90° Handle Position, Rod with handle (2)	NZP Micro switch shroud and wires. Zinc Plated
	C 2000 PSI	T3 Tandem Spool-3 Position Detent		NLR 90° Handle Position, Rod with handle. Configured to install handle 180°. (2)	
	D 2500 PSI	T4 Tandem Spool-Spring Center-Micro Switch		JS Joystick Control	
	E 3000 PSI	T5 Tandem Spool-2 Position Detent, Spool In			
		T6 Tandem Spool- 2 Position Detent, Spool Out			
		M2 Motor Spool- Spring Center			
		M2FL Motor Spool- Heavy Duty Spring Center			
		M3 Motor Spool- 3 Position Detent			
		M4 Motor Spool- Spring Center- Micro Switch			
	M5 Motor Spool- 2 Position Detent, Spool In				
	M6 Motor Spool- 2 Position Detent, Spool Out				
	Y2 3 Way Spool- Spring Center				
	Y3 3 Way Spool- 3 Position Detent				
	Y4 3 Way Spool- Spring Center- Micro Switch				


D2- Monoblock Directional Hydraulic Control Valve

Spool Type Options:




T1- FLOAT SPOOL (spool actuator options not available)

4 WAY 4 POSITION OPEN CENTER This spool option is used to control a double acting cylinder or a reversible motor. In the fourth position both of the work ports are open and oil goes through the open center passage. In neutral both of the work ports are blocked and oil goes through the open center passage to the next spool of a multi-spool valve or the power beyond of a single spool valve.




T- TANDOM SPOOL

4 WAY 3 POSITION OPEN CENTER This spool option is used to control a double acting cylinder or a reversible motor. In neutral both of the work ports are blocked and oil goes through the open center passage to the next spool of a multi-spool valve or the power beyond of a single spool valve.



M- MOTOR SPOOL

4 WAY 3 POSITION OPEN CENTER This spool option is used to control a double acting cylinder or a reversible motor. In neutral both of the work ports are open and oil goes through the open center passage to the next spool of a multi-spool valve or the power beyond of a single spool valve.



Y- 3 WAY 3 POSITION SPOOL


3 WAY 3 POSITION OPEN CENTER This spool option is used to control a single acting cylinder or a unidirectional motor. In neutral the work ports are blocked and oil goes through the open center passage to the next spool of a multi-spool valve or the power beyond of a single spool valve.

Spool Actuator Options:

- 2- Tandem Spool-Spring Center
- 2FL-** Tandem Spool-Heavy Duty Spring Center
- E2-** Tandem Spool-Spring Center w\ .250 hole in tang.
- 3- Tandem Spool-3 Position Detent
- 4- Tandem Spool-Spring Center-Micro Switch
- 5- Tandem Spool-2 Position Detent, Spool In
- 6- Tandem Spool- 2 Position Detent, Spool Out

D2- Monoblock Directional Hydraulic Control Valve


Relief Valve Options:




- O**– No relief valve installed
- G**– Relief valve set at 900 psi adjustable range is from (500 to 2499 psi)
- A**– Relief valve set at 1000 psi adjustable range is from (500 to 2499 psi)
- B**– Relief valve set at 1500 psi adjustable range is from (500 to 2499 psi)
- C**– Relief valve set at 2000 psi adjustable range is from (500 to 2499 psi)
- D**– Relief valve set at 2500 psi adjustable range is from (2500 to 3000 psi)
- E**– Relief valve set at 3000 psi adjustable range is from (2500 to 3000 psi)

Handle Options:


All Handles are shipped unassembled to prevent damage in transit.



- J**– Stamped handle with grip. (Two handles supplied)
- JU**– Stamped handle with grip. Configured to install handle 180 degrees from image shown. (Two handles supplied)

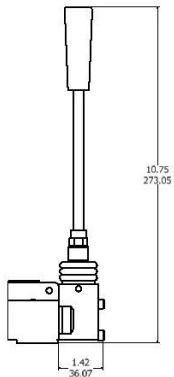

- NL**– 90 degree handle, Rod with handle. (Two handles supplied)
- NLR**– 90 degree handle, Rod with handle. Configured to install handle 180 degrees from image shown. (Two handles supplied)

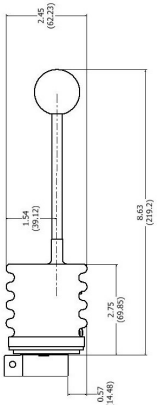

- JS**– Standard joystick handle is used to actuate two adjacent spools with one handle.