



Hydraulic Check Valve, HCV Series



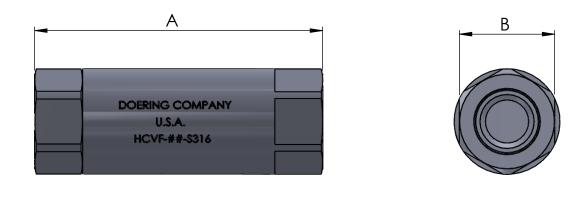



Operation:

HCVF-S316 Inline check value is a flow control value that allows free flow in one direction and checked flow in the opposite direction.

Features:

- Inline check valve-back flow prevention
 Inline valve will operate mounted in any position
 Material is 316 stainless steel, sutible for controlling water.
- Soft seat for leak free seal.
- 1 PSI Crack Pressure (Bias Spring).

Ratings:

Pressure Rating to 6000 PSI (414 bar)

Specifications				
Item	"A"	"B"	"C"	Flow Cv
HCVF-25	3.00"	1.00"	1/4" NPT	2.62
HCVF-38	3.00"	1.00"	3/8" NPT	2.62
HCVF-50	3.63"	1.50"	1/2" NPT	8.39
HCVF-75	3.63"	1.50"	3/4" NPT	8.39